



CS Cavity Slider[®] Pocket Door Frame



Pocket Frame Systems

The CS Cavity Slider® is a practical solution for those areas where there is not enough space for a swinging door.

In addition to its space saving attributes in restrooms, hallways, and laundries, it can be used with confidence for architectural feature openings around your project.


Features

- Structurally robust due to its construction from aluminum extrusions
- Easy to assemble and install
- Available for 90 mm and 140 mm Stud sizes
- Can be cut down to size on site
- Suitable for residential and commercial projects (meets Type 1 construction code without any combustible materials)

Structural Opening

DH - Door Height DW - Door Width

Dimension	Formula
SO Height	DH + 100 mm
SO Width Single	(DW x 2) + 50 mm
SO Width Bi-Parting	(DW x 4) + 50 mm

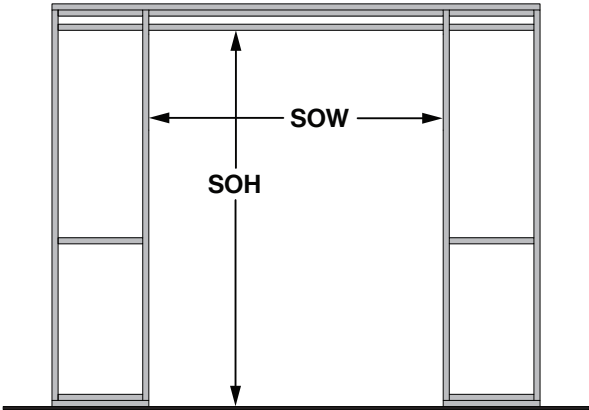

How to Order

1. Choose Framing and Door Size

Frames can be cut down on site to maximise size for each model:

Framing	CS SKU	Max Door Size	
		Imperial	Metric
90 mm	CSS4K2366	2'3" x 6'6"	686 x 1981 mm
	CSS4K2666	2'6" x 6'6"	762 x 1981 mm
	CSS4K2966	2'9" x 6'6"	838 x 1981 mm


* More sizes available

2. Choose a Carriage Pack (one per door)

Includes: Carriages, mounting plates, T-Guide, fixing screws, and adjusting wrench

Standard	M6 (200 lb / 90 kg)	
	M8 (500 lb / 240 kg)	
	Minimum Door Width	
CS SofStop	No Stop	1 Stop
0 - 200 lb (90 kg)	23" (584 mm)	26" (660 mm)
CS SofStop HD	No Stop	1 Stop
0 - 350 lb (160 kg)	26" (660 mm)	29" (737 mm)

CS Cavity Slider® Features with CS Jamb Kit™




Smooth running carriages with encased ball bearings. Up to 240 kg (500 lb) capacity

SofStop Soft Close/Soft Open also available




Corner joining brackets ensure precise right angled assembly


Head jambs designed for serviceability



Pre-drilled closing jamb for seamless attachment to track profile



90 mm



140 mm

Extruded aluminum track incorporated into head unit




T-joining brackets for easy assembly of slats to split jambs & back stud

Split Jambs and slats use hollow core technology for superior rigidity

Horizontal slats for added strength

Can be easily cut down on site for custom door sizes



Pre-grooved for Trim Clips for quick & easy installation

Compatible with 90 and 140 mm stud sizes

Strong aluminum frame complies with Type 1 Construction

3/4" jamb thickness


Bottom plate assembly

Door Thickness

35-45 mm
90 mm stud

35-57 mm
140 mm stud

Stain-grade poplar prepared and ready for paint



Adjustable T-Guide

Patent Pending



Cycle tested
1 million openings



Disabled Access
Compliant



Available with
SofStop®



Single or
Bi-Parting units



Maximum door
weight

Watch Video




CS Cavity Slider® Pocket Door Frame

Features

- Accommodates 35 to 45 mm doors (1-3/8" to 1-3/4")
- Up to 1220 x 2438 mm door size and can be cut down on site
- Designed for 90 mm Stud Size


Product Specifications

Elevation

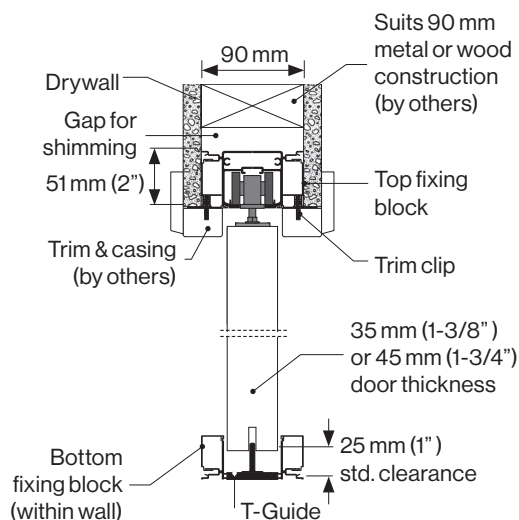

Technical Specifications


Plan

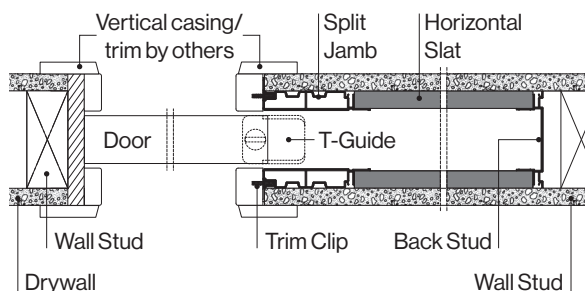

CS Cavity Slider® Ultimate Pocket Door Frame

- The gold standard of pocket frames. It is the largest and most robust manufactured pocket frame on the market
- Accommodates 35 to 57 mm doors
- Up to 1524 x 3048 mm door size and can be cut down on site
- Designed for 140 mm Stud Size

Elevation

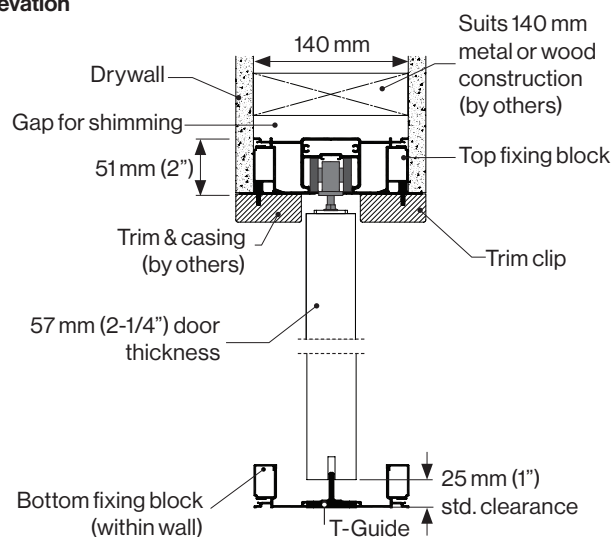

Standard CS Track Features

- Heavy duty one-piece extruded aluminum track.
- Minimal clearance means the carriages/wheels cannot jump off the track or jam.
- Large diameter wheels with precision ground bearings make for smooth running.
- Radiused track reduces friction and allows dust to be pushed into the gutters so the door always slides smoothly.
- M8 body made from cast stainless steel for strength and reliability. 4-wheel carriages are standard on all doors over (90 kg) 200 lb.
- CarriSnap™ quick release system allows the door to be removed easily from the track; no need to unscrew anything and lose door height adjustment.

© All copyright and other property in this document is reserved by Cavity Sliders USA Inc. Details and specifications are subject to change without notice. Whilst all care is taken to ensure the accuracy of all information, no responsibility will be accepted for any errors or omissions. 06/2026

CavitySliders.com

sales@cavitysliders.com

Designed in New Zealand

Specs and Instructions

