
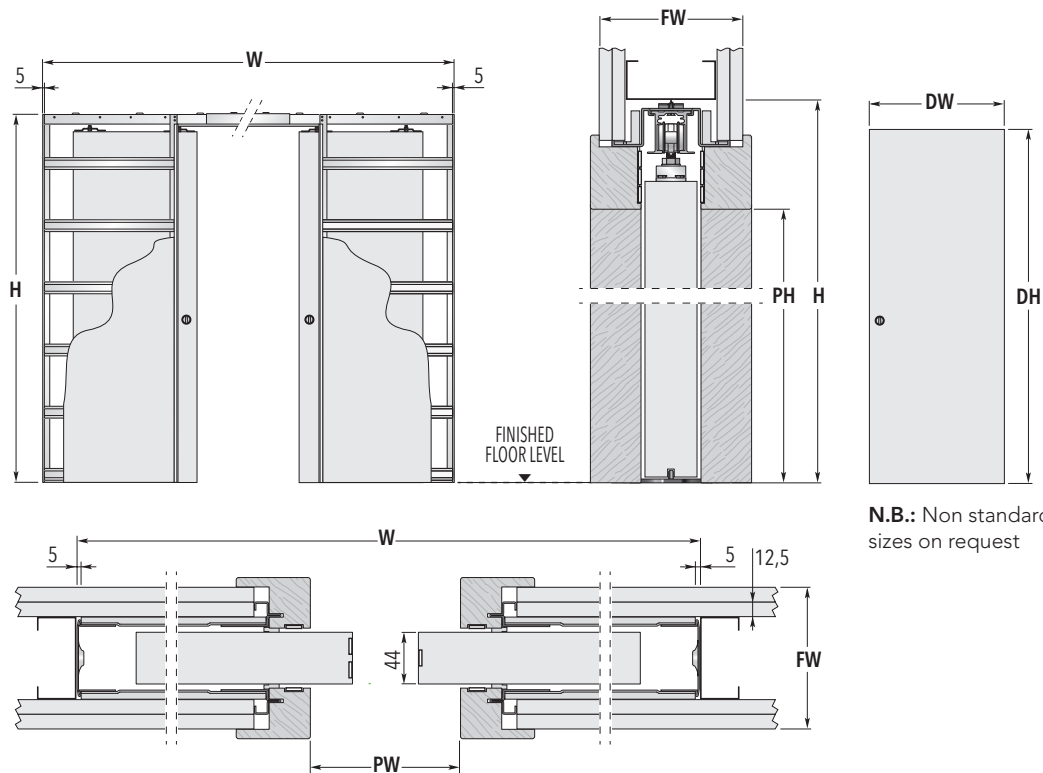


# CLASSIC DOUBLE FIRE RATED

## DOUBLE FD30 POCKET DOORS SYSTEM



**N.B.:** Non standard sizes on request

FRAMES FOR DOUBLE DOORS			DOOR PANEL UK	
MAX. PASSAGE SIZE PW x PH	OVERALL DIMENSION W x H	FINISHED WALL FW	DW	DH
1180 x 2020	2494 x 2120	120	626	2040
1380 x 2020	2894 x 2120	120	726	2040
1580 x 2020	3294 x 2120	120	826	2040
1780 x 2020	3694 x 2120	120	926	2040
1980 x 2020	4094 x 2120	120	1026	2040
1150 x 1960	2464 x 2061	120	2ft. 0in. x 6ft. 6in. (610 x 1981 mm)	
1302 x 1960	2816 x 2061	120	2ft. 3in. x 6ft. 6in. (686 x 1981 mm)	
1454 x 1960	3168 x 2061	120	2ft. 6in. x 6ft. 6in. (762 x 1981 mm)	
1606 x 1960	3320 x 2061	120	2ft. 9in. x 6ft. 6in. (838 x 1981 mm)	
1780 x 1960	3694 x 2061	120	3ft. 0in. x 6ft. 6in. (914 x 1981 mm)	

Dimensions are given in mm



### NOTES

- ▶ Suitable for use with 44 mm thick FD30 timber doors (not supplied)
- ▶ Supplied with special jambs with integrated architrave.
- ▶ Max. door weight 100 kg.
- ▶ FD30 door and fireboard not supplied.
- ▶ Install at finished floor level.
- ▶ Self centering floor guide with anti-warp profile.
- ▶ Finished wall thickness 120 mm (frame thickness 70 mm).
- ▶ Intumescent strips included.
- ▶ Use two layers of 12.5 mm fireboard each side (not supplied).



### ACCESSORIES

- ▶ **Self Closing Mechanism\***  
Open the door and it closes by itself
- ▶ **ECLISSE BIAS®**  
Soft close anti-slam device with 40 kg soft closing

\* Please check first with your Building Inspector prior to ordering to determine whether or not your particular project will require a self-closing mechanism.



**INTERNATIONAL FIRE  
CONSULTANTS GROUP**

The system was tested to BS EN 1634-1:2008 for fire resistance at Cambridge Fire Research which is an independent UKAS accredited testing laboratory.