

TELESCOPIC SINGLE

FRAME FOR TWO PARALLEL DOORS



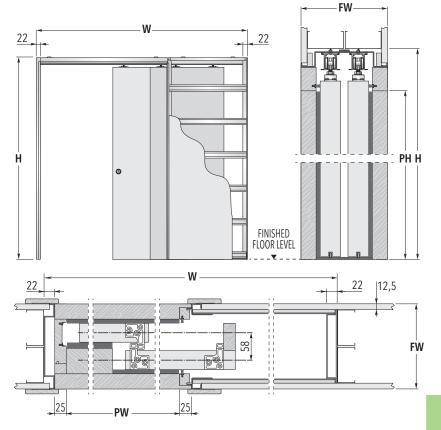



Note: Non standard sizes on request

PLEASE NOTE INBUILT TOLERANCE

If setting out your studwork before delivery of your frame please note there is approximately an 8mm tolerance built into the height of these pocket door systems which you will need to take into account. Packers may be required to accommodate for this gap if you are unable to adjust the studwork above the system.

Note: Frame should be installed at finished floor level.

FRAMES FOR TWO PARALLEL DOORS			DOOR PANELS UK	
MAX. PASSAGE SIZE PW x PH	OVERALL DIMENSION	FINISHED WALL	DW	DU
PW X PH	WxH	FW	DW	DH
1140 x 2030	1859 x 2120	180	626	2040
1340 x 2030	2159 x 2120	180	726	2040
1540 x 2030	2459 x 2120	180	826	2040
1740 x 2030	2759 x 2120	180	926	2040
1940 x 2030	3059 x 2120	180	1026	2040
1108 x 1971	1827 x 2061	180	2ft. 0in. x 6ft. 6in. (610 x 1981 mm)	
1260 x 1971	2079 x 2061	180	2ft. 3in. x 6ft. 6in. (686 x 1981 mm)	
1412 x 1971	2331 x 2061	180	2ft. 6in. x 6ft. 6in. (762 x 1981 mm)	
1564 x 1971	2483 x 2061	180	2ft. 9in. x 6ft. 6in. (838 x 1981 mm)	
1740 x 1971	2759 x 2061	180	3ft. 0in. x 6ft. 6in. (914 x 1981 mm)	

Dimensions are given in mm



NOTES

- ▶ Non standard sizes available up to PW 2340 x PH 2600 mm.
- Suitable for 35 or 44 mm thick doors.
- ▶ Includes a full timber lining kit for a professional finish.
- ▶ Door panels, plasterboard and final architraves not supplied.
- When fully open the leading door panel projects 9 cm out of the pocket.
- Install at finished floor level.
- Max. door panel weight 100 kg.



ACCESSORIES

▶ Door Furniture

Flush pulls and bathroom locks

► Telescopic Synchronisation

Open and close both door panels with smooth action (recommended)



Sliding Pocket Door Systems